



Инструкция по настройке роутера Dlink DIR-100



Оглавление.

1. Рекомендации, Авторизация.....стр. 3
2. Смена заводского пароля.....стр. 4
3. Настройка PPPoEстр. 6
4. Настройка PPtP (VPN) при автоматическом получении локального IP адреса (DHCP).....стр. 7
5. Настройка PPtP (VPN) при статическом локальном IP адресе.....стр. 8
6. NAT при автоматическом получении IP адреса (DHCP).....стр. 9
7. Сохранение/восстановление настроек.....стр. 10

Рекомендации.

1. По умолчанию, Логин admin, пароль пустой.
2. Курьеры-настройщики должны в настройках изменять пароль на Серийный номер, указанный на коробке (S/N). При перенастройке рекомендуется также использовать в качестве пароля на роутер и wi-fi S/N (серийный номер).
3. Сброс настроек роутера производится путем нажатия и удержания кнопки Reset на задней панели роутера в течении 10 секунд.

Авторизация.

Для того, что бы попасть в веб-интерфейс роутера, необходимо открыть ваш Интернет браузер и в строке адреса набрать <http://192.168.0.1> , User Name **admin** , Password – **оставить данное поле пустым** (при условии, что роутер имеет заводские настройки, и его IP не менялся).



Смена заводского пароля.

В целях безопасности рекомендуется сменить заводской пароль.


По умолчанию: Логин admin, пароль пустой.

Курьеры-настройщики должны в настройках изменять пароль на Серийный номер, указанный на коробке (S/N). При перенастройке рекомендуется также использовать в качестве пароля на роутер и wi-fi S/N (серийный номер).

В интерфейсе роутера необходимо зайти во вкладку **MAINTENANCE**, меню **DEVICE ADMINISTRATION**.

В поле **New Password** введите новый пароль.

В поле **Confirm Password** повторите новый пароль.

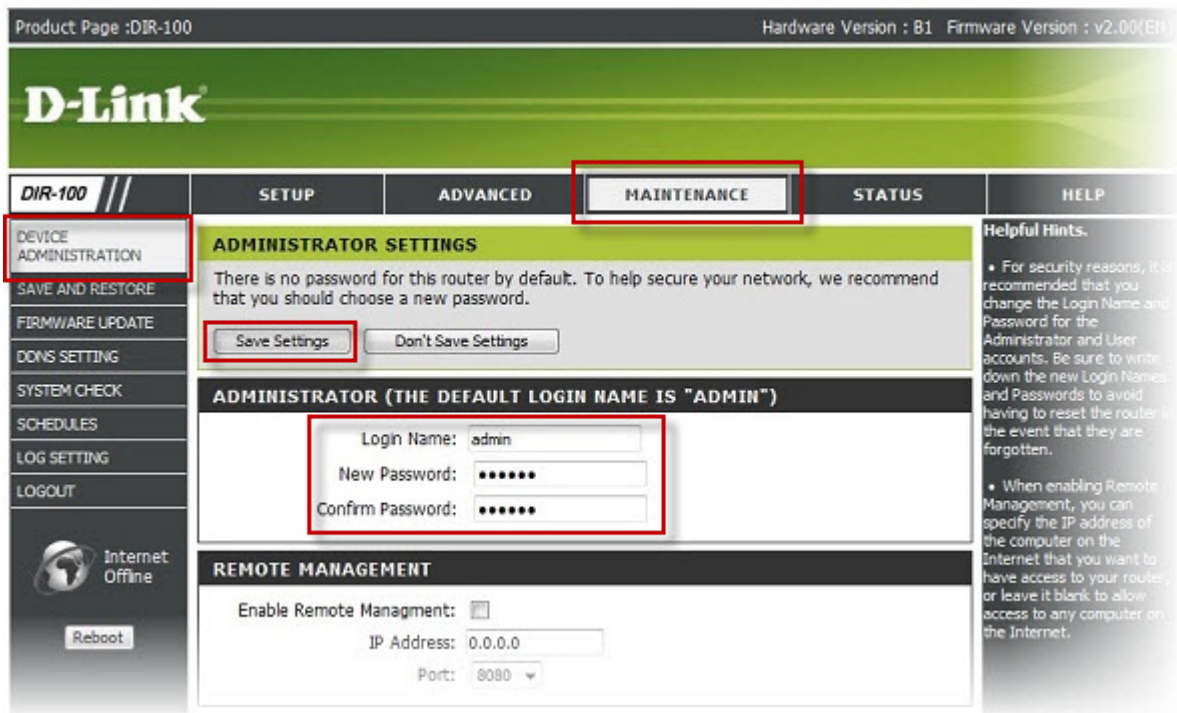

Затем нажмите кнопку **Save Settings**.

После этого, роутер предложит повторно зайти в его настройки.

Настройка подключения к Интернет.

В интерфейсе роутера необходимо выбрать вкладку сверху «**SETUP**», в открывшемся списке выбираем «**INTERNET SETUP**». Нажимаем кнопку **Manual Internet Connection Setup**.

The screenshot displays the web management interface for a D-Link DIR-100 router. At the top, it shows 'Product Page :DIR-100' and 'Hardware Version : B1 Firmware Version : v2.02(ET)'. The D-Link logo is prominently displayed. A navigation bar contains tabs for 'DIR-100', 'SETUP', 'ADVANCED', 'MAINTENANCE', 'STATUS', and 'HELP'. The 'SETUP' tab is selected and highlighted with a red box. On the left sidebar, 'INTERNET SETUP' is also highlighted with a red box. The main content area is titled 'INTERNET CONNECTION' and contains the following sections:

- INTERNET CONNECTION**: A text block stating: "If you are configuring the device for the first time, we recommend that you click on the Internet Connection Setup Wizard, and follow the instructions on the screen. If you wish to modify or configure the device settings manually, click the Manual Internet Connection Setup."
- INTERNET CONNECTION SETUP WIZARD**: A text block stating: "If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Router to the Internet, click on the button below." Below this text is a button labeled "Internet Connection Setup Wizard".
- MANUAL INTERNET CONNECTION OPTIONS**: A text block stating: "If you would like to configure the Internet settings of your new D-Link Router manually, then click on the Manual Configure button below." Below this text is a button labeled "Manual Internet Connection Setup", which is highlighted with a red box.

On the right side of the interface, there is a 'Helpful Hints' section with two bullet points:

- If you are new to networking and have never configured a router before, click on **Internet Connection Setup Wizard** and the router will guide you through a few simple steps to get your network up and running.
- If you consider yourself an advanced user and have configured a router before, click **Manual Internet Connection Setup** to install all the settings manually.

Настройка PPPoE подключения.

1. My Internet Connection is: **PPPoE**
2. **User Name:** Ваш логин из договора
3. **Password:** Ваш пароль из договора
4. **Confirm Password:** повтор пароля
5. Нажимаем кнопку **Clone MAC Address**
6. **MTU:** 1472
7. **Connect mode select** – режим установки соединения "**Always-on**" для постоянного подключения.
8. Сохраняем настройки кнопкой «**Apply**».

The screenshot shows the router's configuration page for PPPoE. The left sidebar contains 'PARENTAL CONTROL', 'LOGOUT', 'Internet Offline', and a 'Reboot' button. The main content area is titled 'INTERNET CONNECTION TYPE' and 'PPPOE'. It includes a note about removing PPPoE client software, a 'Save Settings' button (highlighted with a red box), and a dropdown menu for 'My Internet Connection is' set to 'PPPoE (Username / Password)' (also highlighted with a red box). Under the 'PPPOE' section, there are radio buttons for 'Dynamic PPPoE' (selected) and 'Static PPPoE'. Fields for 'User Name' (Логин по договору), 'Password' (Пароль по договору), and 'Confirm Password' (Пароль по договору) are present. There are also fields for 'Service Name', 'IP Address', 'MAC Address' (with a 'Duplicate the Mac address from your current PC.' button highlighted in red), 'Primary DNS Address', 'Secondary DNS Address', 'Maximum Idle Time' (5 Minutes), and 'MTU' (highlighted with a red box). The 'Connect mode select' section has radio buttons for 'Always-on' (selected), 'Manual', and 'Connect-on demand'. A right sidebar contains support information.

Настройка PPTP (VPN) при автоматическом получении локального IP адреса (DHCP).

1. В поле **My Internet Connection is:** выберите **PPTP**.
2. Выберите подключение с динамическим назначением адреса провайдером Dynamic IP.
3. Нажимаете кнопку **Clone MAC Address**.
4. **Server IP/Name** – IP/Имя сервера провайдера (ppp.lan либо 10.10.3.36)
5. **PPTP Account** – имя пользователя для авторизации в сети провайдера.
6. **PPTP Password** – пароль для авторизации в сети провайдера.
7. **PPTP Confirm Password** – повторите пароль для авторизации в сети провайдера.
8. Значение **MTU** – **1372**
9. **Connect mode select** - режим установки соединения. Выберите "**Always**" для постоянного подключения.
10. Сохраняете настройки нажатием клавиши **Save Settings**

The screenshot shows the 'INTERNET CONNECTION TYPE' configuration page. The 'My Internet Connection is:' dropdown menu is set to 'PPTP (Username / Password)'. Below this, the 'PPTP' section is active, showing 'Dynamic IP' selected. The 'MAC Address' field is highlighted with a red box and the text 'Duplicate the Mac address from your current PC.' The 'Server IP/Name' field is set to '0.0.0.0' with a red arrow pointing to it. The 'PPTP Account' field contains 'Логин по договору', 'PPTP Password' contains 'Пароль по договору', and 'PPTP Confirm Password' also contains 'Пароль по договору'. The 'Maximum Idle Time' is set to '5 Minutes'. The 'MTU' field is set to '1372' with a red arrow pointing to it. The 'Connect mode select' is set to 'Always-on' with a red circle around the radio button.

Настройка PPTP (VPN) при статическом локальном IP адресе.

1. В поле **My Internet Connection is:** выберите **PPTP**
2. Ставим точку напротив **Static IP**
3. **IP Address:** Вбиваем ваш IP адрес по договору
4. **Subnet Mask:** Вбиваем маску по договору
5. **Gateway:** Вбиваем шлюз по договору
6. **DNS:** 212.1.224.6
7. **Server IP/Name:** ppp.lan (либо 10.10.3.36)
8. **PPTP Account:** Ваш логин из договора
9. **PPTP Password:** Ваш пароль из договора
10. **PPTP Confirm password:** Ваш пароль из договора
11. **Auto-reconnect:** Always-on
12. **MTU:** 1372
13. Сохраняете настройки нажатием клавиши **Save Settings**.

DIR-100	SETUP	ADVANCED	MAINTENANCE	STATUS
INTERNET SETUP	INTERNET CONNECTION			
LAN SETUP	Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, and BigPond. If you are unsure of your connection method, please contact your Internet Service Provider.			
TIME AND DATE	Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.			
PARENTAL CONTROL	<input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/>			
LOGOUT	INTERNET CONNECTION TYPE			
Internet Offline	Choose the mode to be used by the router to connect to the Internet.			
<input type="button" value="Reboot"/>	My Internet Connection is: <input type="text" value="Russia PPTP(Dual Access)"/>			
	RUSSIA PPTP (DUAL ACCESS)			
	Enter the information provided by your Internet Service Provider (ISP).			
	<input type="radio"/> Dynamic IP <input checked="" type="radio"/> Static IP			
	IP Address: <input type="text"/> (assigned by your ISP)			
	Subnet Mask: <input type="text"/>			
	Gateway: <input type="text"/>			
	DNS: <input type="text"/>			
	MAC Address: <input type="text"/> - <input type="text"/> - <input type="text"/> - <input type="text"/> - <input type="text"/> - <input type="text"/> (optional)			
	<input type="button" value="Duplicate the Mac address from your current PC."/>			
	Server IP/Name: <input type="text"/>			
	PPTP Account: <input type="text" value="Логин по договору"/>			
	PPTP Password: <input type="text" value="Пароль по договору"/>			
	PPTP Confirm Password: <input type="text" value="Пароль по договору"/>			
	Maximum Idle Time: <input type="text" value="5"/> Minutes			
	MTU: <input type="text" value="1372"/> ←			
	Connect mode select: <input checked="" type="radio"/> Always-on <input type="radio"/> Manual <input type="radio"/> Connect-on demand			
	<input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/>			

NAT при автоматическом получении IP адреса (DHCP).

1. **My Internet Connection is:** Dynamic IP (DHCP)
2. Ставим точку напротив **Obtain IP Automatically**
3. Нажимаем кнопку **Duplicate the Mac address from current PC**
4. **Primary DNS Address:** 212.1.224.6
5. **Secondary DNS Address:** 212.1.230.111
6. **MTU:** 1492
7. Сохраняете настройки нажатием клавиши **Save Settings**.

DIR-100 // SETUP ADVANCED MAINTENANCE STATUS HELP

INTERNET SETUP

LAN SETUP
TIME AND DATE
PARENTAL CONTROL
LOGOUT

Internet Online
Reboot

INTERNET CONNECTION

Use this section to configure your Internet Connection type. There are several connection types to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, and BigPond. If you are unsure of your connection method, please contact your Internet Service Provider.

Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

Save Settings Don't Save Settings

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is: Dynamic IP (DHCP)

DYNAMIC IP (DHCP) INTERNET CONNECTION TYPE

Use this Internet connection type if your Internet Service Provider (ISP) didn't provide you with IP Address information and/or a username and password.

Host Name: DIR-100

MAC Address: [] - [] - [] - [] - [] - [] (optional)
Duplicate the Mac address from your current PC.

Primary DNS Address: 0.0.0.0

Secondary DNS Address: 0.0.0.0 (optional)

MTU: []

Helpful Hints.

- **Internet Connection:** When configuring the router to access the Internet, be sure to choose the correct **Internet Connection Type** from the drop-down menu. If you are still unsure of which option to choose, please contact your **Internet Service Provider (ISP)**.
- **Support:** If you are having trouble accessing the Internet through the router, double check any settings you have entered on this page and verify them with your ISP if needed.

